


One-Piece Overhead Style. Bow Type.

Model	Application	Floor Width
BOW401P	All Service Bodies.	40"
BOW491P	All Service Bodies.	49"
BOW511P	All Service Bodies.	51"
BOW541P	All Service Bodies.	54"
BOW591P	All Service Bodies.	59"/60"
BOW651P	All Service Bodies.	65"


Not available with Rear Access Doors or Light Holes High.

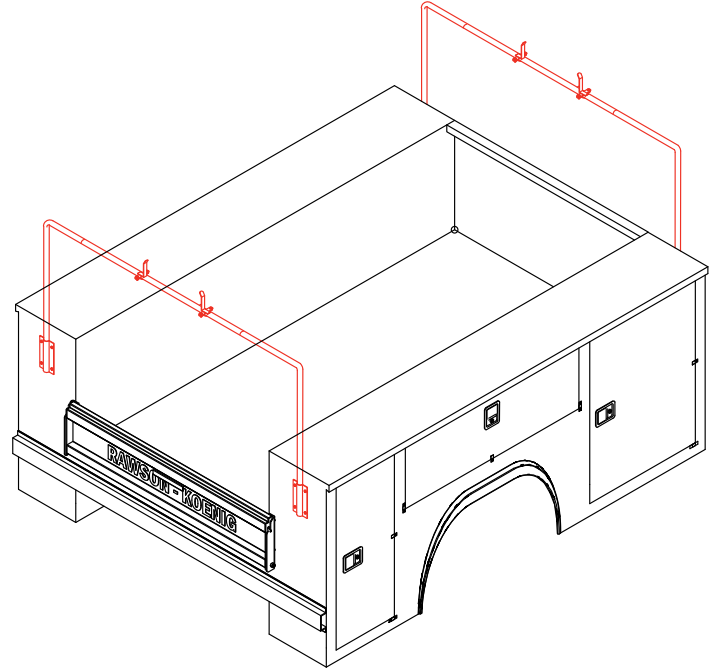

Two-Piece Overhead Style. Bow Type.


Model	Application	Floor Width
LRO40	All Service Bodies.	40"
LRO49	All Service Bodies.	49"
LRO51	All Service Bodies.	51"
LRO54	All Service Bodies.	54"
LRO59	All Service Bodies.	59"/60"
LRO65	All Service Bodies.	65"

Not available with Rear Access Doors or Light Holes High.

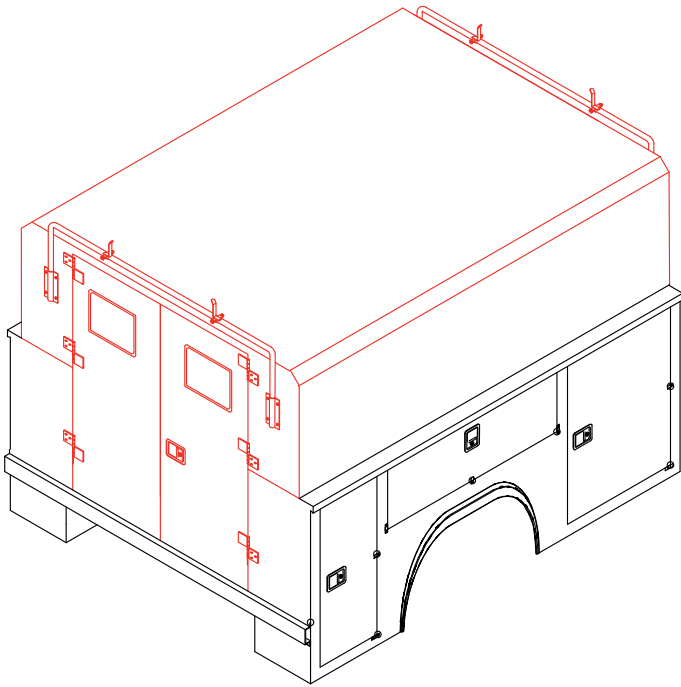


One-Piece Overhead Style. Bow Type. For Bodies with Canopies

Model	Application	Floor Width
BOW40C1P	All Canopies.	40"
BOW49C1P	All Canopies.	49"
BOW51C1P	All Canopies.	51"
BOW54C1P	All Canopies.	54"
BOW59C1P	All Canopies.	59"/60"
BOW65C1P	All Canopies.	65"

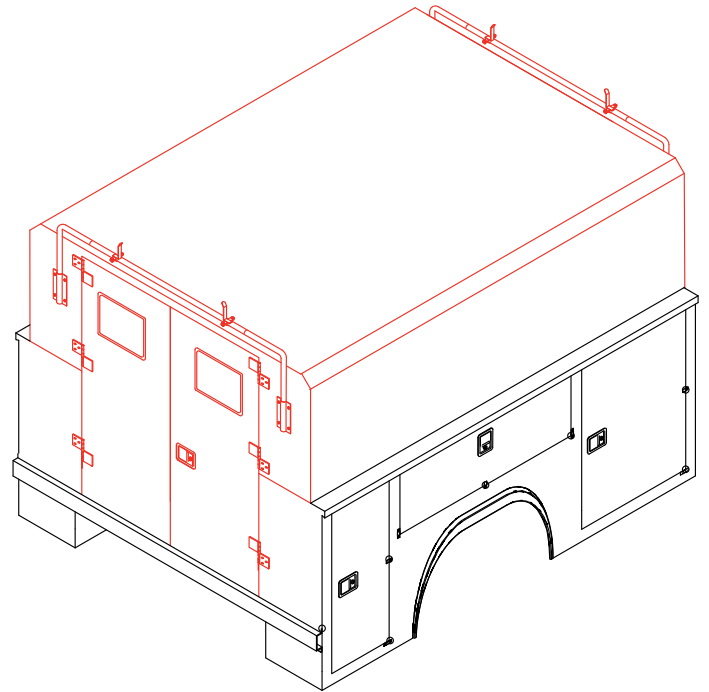

Overhead Style. Bow Type. For Bodies with Canopies


Model	Application	Floor Width
LRO40C	All Canopies.	40"
LRO49C	All Canopies.	49"
LRO51C	All Canopies.	51"
LRO54C	All Canopies.	54"
LRO59C	All Canopies.	59"/60"
LRO65C	All Canopies.	65"

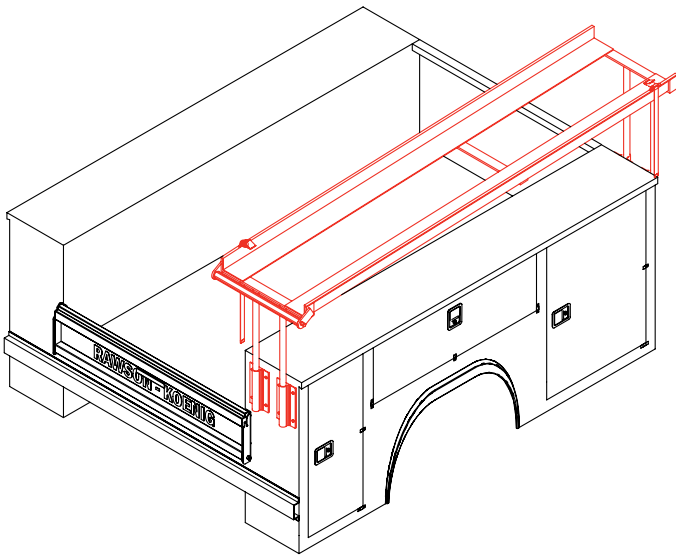

Side Mounted, Flat Type with roller on rear end and web strap hold-down.


Model	Application	Body Length
LRF74	All Service Bodies.	74"
LRF84	All Service Bodies.	84"
LRF96	All Service Bodies.	96"
LRF108	All Service Bodies.	108"
LRF132	All Service Bodies.	132"
LRF156	All Service Bodies.	156"
LRF168	All Service Bodies.	168"

Not available with Rear Access Doors or Light Holes High.

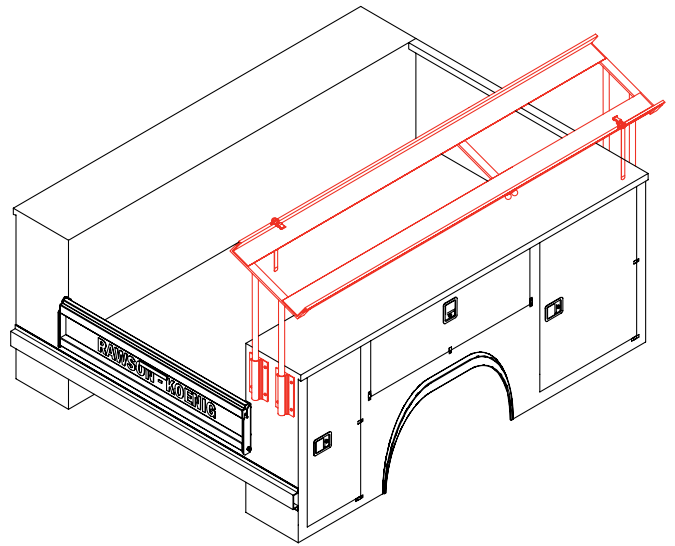


* Side Angle Type with full length rails and two (2) hold-down straps.


Model	Application	Body Length
LRA74	All Service Bodies.	74"
LRA84	All Service Bodies.	84"
LRA96	All Service Bodies.	96"
LRA108	All Service Bodies.	108"
LRA132	All Service Bodies.	132"
LRA156	All Service Bodies.	156"
LRA168	All Service Bodies.	168"

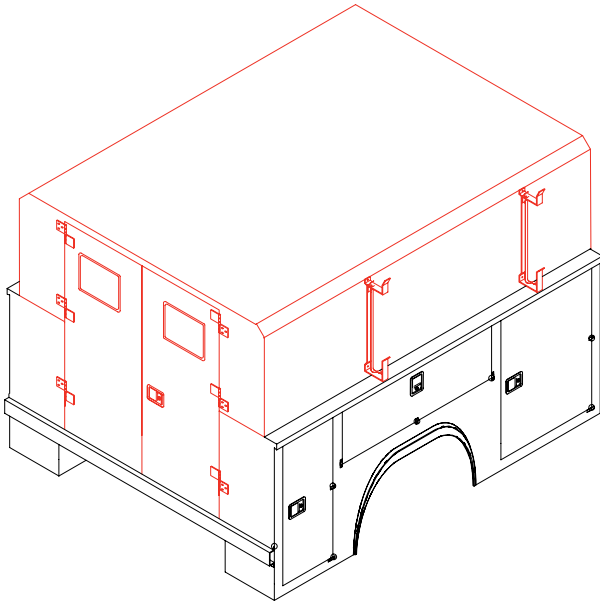

Model	Application
LRK2	Side mounted vertical for superstructure/canopy with 2 hold-down straps.

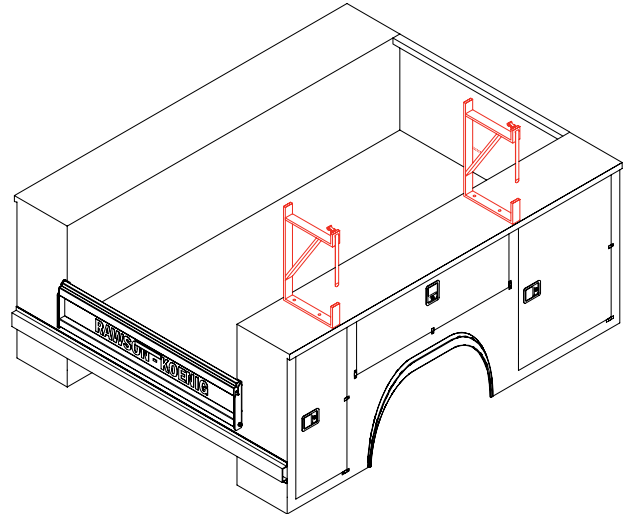

Model	Application
LRK4	Top mounted vertical for compartment top with 2 hold-down straps.

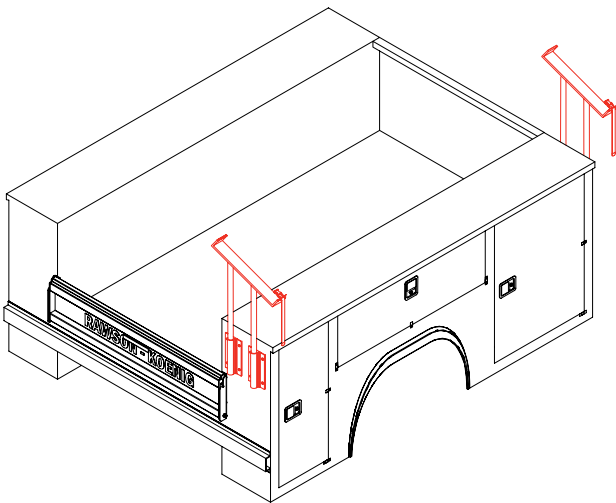

Model	Application
LRK5	End mounted angle type - front and rear upright only with 2 hold-down straps.

Not available with Rear Access Doors or Light Holes High.



SIDE MOUNT LADDER RACKS							
Model	Description	Upright Assemblies	Color	Height ¹	Width	Product Weight	Shipping Weight
LRSMB	LAD RACK-SIDE MNT BLK	Full Set (Pair)	White	42" - 49"	19" - 34"	53 lbs	58 lbs
LRSMB	LAD RACK-SIDE MNT BLK		Black				
LRSMS	LAD RACK-SMNT 1/2SET WHT	½ Set (Single)	White				
LRSMSB	LAD RACK-SMNT 1/2SET BLK		Black				

¹ Height measured to top of horizontal bar

Features

- 250 lbs. load capacity (when used in pairs).
- Fully welded heavy gauge steel tubing construction.
- Universal design fits most pickup trucks, as well as RKI Service Bodies.
- Multiple installation locations include driver side, passenger side, front and rear, or rear only.
- Vertical height¹ can be adjusted from 42" to 49" for a custom fit to a variety of applications.
- Load area adjusts from 19" to 34" wide to accommodate various ladder and material widths.
- Durable polyester powder coat finish for years of service is available in black or white.
- Adjustable steel Ladder stop and hook-n-loop straps included to aid organizing and restraining cargo.
- Protective strips on the load surface shield ladders from wear during loading/unloading and transport.
- Main vertical uprights are easily removed from mounting base when the rack is not needed.
- All mounting brackets and hardware are included for the installation.
- Made in USA and includes the RKI standard Lifetime Warranty.

